

DAF-250Ex

FRONT-MOUNTED MULCHERS

Achieve
High Productivity
and **Low Costs**

in land clearing and vegetation control.

ideal for intensive brushcutting applications mounted on wheeled or tracked skid steers or other dedicated units that are designed for use with front-mounted attachments.



Industrial Land Clearing



Forest Fire Prevention



Road Development
and Maintenance



Pipelines Development
and Maintenance



Transmission Lines
Development and Maintenance

DAF-250Ex

FRONT-MOUNTED MULCHERS



Motor

Variable displacement, axial-piston motors that minimize overheating and improve re-acceleration.



Drive

Industrial cogged belt drive system that prevents slippage and reduces effort applied to bearings compared with V-belts, for longer bearing life.



Rings

Protective rings that limit the size of the bites and considerably reduce risks of breakage on the knife holders.



Replaceable Liner


With the high speeds and forces involved in industrial mulching, even the hardest steel frame is subject to wear and tear. This easy-to-replace, bolt-in wear liner extends the lifetime of the unit by protecting the frame.

Hydraulic pushbar option

Especially useful when working in older growth as a secure way to direct where big trees will fall when cutting them down

SPECIFICATIONS	DAF-250Ex	HYDRAULIC SYSTEM	DAF-250Ex
Approximate Min. Carrier Power [kW (hp)]	190 (250)	Variable Displacement Axial Piston Motor [cc]	2x 115
Cutting Width [cm (in)]	251 (99)	Required Continuous Flow [L/min (gal/min)]	276 (73)
Cutting Distance from Ground Level [cm (in)]	1 (0.4)	Max. Operating Pressure [bar (psi)]	240 (3500)
Number of Blades on Rotor	35	Rotating Speed [rpm]	2500
Optimal Target Material Diameter [cm (in)]	60 (24)	Pressure Line I.D. [# (in)]	#20 (1.25)
Exterior Width [cm (in)]	261 (103)	Return Line I.D. [# (in)]	#20 (1.25)
Exterior Height (with Pushbar) [cm (in)]	155 (61)	Drain Line I.D. [# (in)]	#16 (1.00)
Exterior Width (with Pushbar) [cm (in)]	127 (50)		
Exterior Height (without Pushbar) [cm (in)]	98 (38)		
Exterior Width (without Pushbar) [cm (in)]	83 (33)		
Rotor Diameter [cm (in)]	51 (20)		
Approximate Typical Weight [kg (lbs)]	2450 (5400)		

OPTIONS	DAF-250Ex
Type of Sharpenable Bolt-on Forged Blades	Standard
Hydraulic Pushbar	✓
Bolt-on wear liner	✓

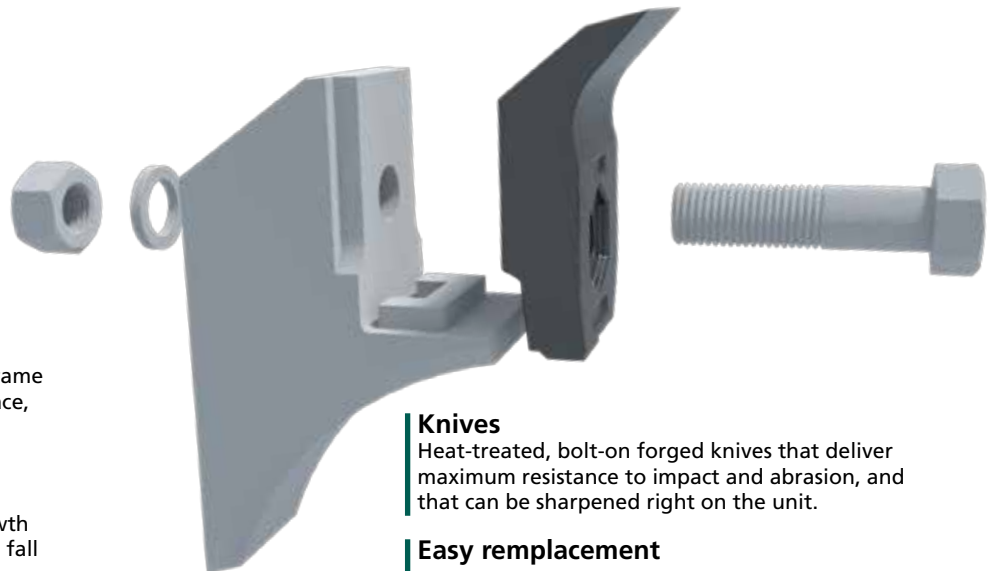

Knives

Heat-treated, bolt-on forged knives that deliver maximum resistance to impact and abrasion, and that can be sharpened right on the unit.

Easy replacement

Easy-to-replace knives: A single nut and bolt holds the knife in place. Replacing worn knives is a very easy.

CONTACT US

Printed in Canada : 2018-02

211 rue Notre-Dame
Roxton Falls QC J0H 1E0
Canada
www.deniscimaf.com

Toll free : 877-279-2300
Phone : 450-548-7007
Fax: 450-548-7008
info@deniscimaf.com

DENIS  **CIMAF**